



HELVEI EVENTONE. Mount front wheel + adjust brake.

- 1) Check if the brake pads are placed well.

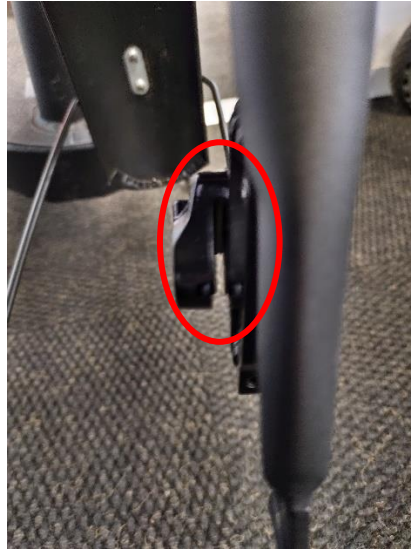

- 2) Insert the wheel into the front fork and make sure it is straight.

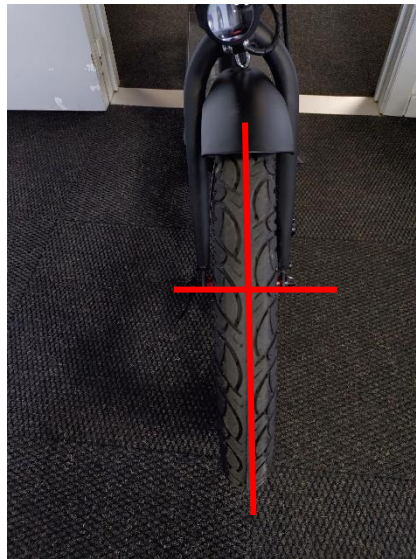

- 3) Tighten the fastener to the desired tension (not too tight, not too loose) and tighten the safety clamp.



- 4) Turn the wheel to see if the disc is sitting nicely between the pads. If you do not hear the brake rubbing against the pads, you are safe to drive!
- 5) If you notice that the brake disc does rub against the brake pads, you need to adjust the brake (see description below).



⇒ Unscrew the brake caliper. Take the supplied Allen key and loosen the 2 bolts.



⇒ Squeeze the brake. Keep it depressed until the adjustment is complete.



⇒ Tighten the caliper. Now tighten the caliper bolts, hand-tight at first. Then tighten the upper and lower bolts. Meanwhile, keep the handbrake firmly pressed.

6) Done !

Need technical assistance? Contact : [info@helvei.com](mailto:info@helvei.com) or [service@houseofmusic.be](mailto:service@houseofmusic.be)